


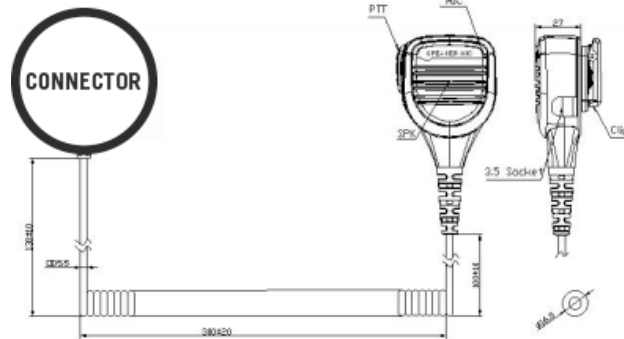

Model: **TX308-** (xxx)

Connector Suffix	Radio Models
M02 	Motorola HT-750/ 1250/ 1550/ PRO5150/5350/5450/5550/7150/7350/7450/7550/9150
Speaker Specification:	
Type:	Moving coil dynamic speaker
Impedance:	$8\Omega \pm 15\%$ at 1000Hz
Sensitivity:	$92 \pm 3\text{dB}/1\text{Watt}$. 0.5Meter
Frequency respond:	(F0) ~20 kHz
Rated input power:	F0~9KHz
Maximum input:	500 mW
Microphone Specification:	
Sensitivity range:	$-30 \pm 3\text{ dB}$ (0 dB=1 V/Pa,at 1 kHz)
Impedance max:	$2.2\text{K}\Omega$ 1kHz (RL=2.2K Ω)
Frequency:	20 ~ 20 kHz (0 dB=1V/Pa, 1 kHz)
Operation Voltage Range:	1.0 V - 10 V(DC)