




4-16 AWG WIRES
 RED - POSITIVE(+)
 BLACK - NEGATIVE(-)
 YELLOW - PATTERN SET
 BLUE - SYNC

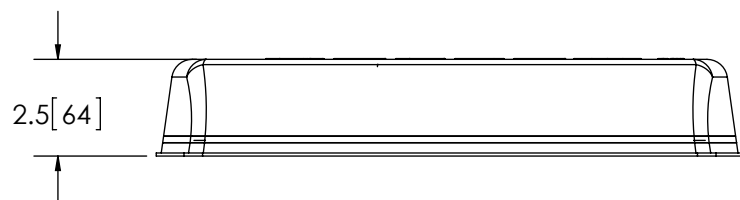

4X Ø0.25[6]
 MOUNTING HOLES

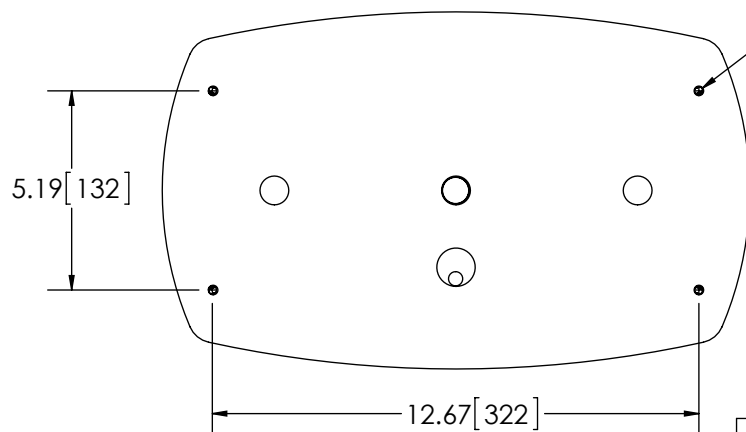

NOTES:
 1. ROHS COMPLIANT
 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]



REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE PER P12020	2012-08-08
A	INITIAL RELEASE PER P12020	2013-11-15
B	REVISE PER P12020	2016-01-26

SPECIFICATIONS

- CERTIFICATIONS: **CE**; ECE R10; SAE J845 (JUN 2013); CLASS 1 YELLOW; CA Title 13 CLASS E; IP-65D CATEGORY 2
 Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: DOUBLE : 75 ± 5 FLASHES PER MINUTE
 QUAD : 75 ± 5 FLASHES PER MINUTE
 QUINT : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 4-16 AWG WIRES
- MOUNTING: 4 BOLT MOUNT KIT
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 2.65 LBS (1.19 Kg)

FGS PRODUCT CHART

FGS. NO.	COLOR	CURRENT(PEAK)	POWER (MAX)	SAE J845(JUNE 2013)
5585CA	CLR/AMB	4.6A	58.9W	CLASS 1
5585CB	CLR/BLUE	4.1A	52.5W	CLASS 1
5585CC	CLR/CLR	4.2A	54.3W	CLASS 1
5585CG	CLR/GRN	4.5A	57.6W	
5585CR	CLR/RED	4.5A	57.6W	CLASS 1

SCALE 1:5			APPROVALS		DATE		<div><div>www.eccolink.com</div><div>Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444</div></div>		
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:B			DRAWN BY ABD		2016-01-20				
			CHECKED ABB		2016-01-22				
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG. NMT		2016-01-21		<div>LED MINIBAR,8 HEAD,12-24VDC,C1</div> <div><div>CUSTOMER PART NO. SEE CHART</div><div>PRODUCT SERIES: 5500</div></div>		
<div>MILLIMETERS DECIMALS</div> <div>XX. ± 1.0mm XX.X ± 0.5mm</div>	<div>INCHES DECIMALS</div> <div>X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02</div>	<div>ANGLES ± 0.5°</div> <div>FRACTIONS ± 1/64</div>	ELEC. ENG. TJT		2016-01-20				
			TEST ENG. JRT		2016-01-25				
			SALES. LAT		2016-01-20		<div>SIZE: A</div> <div>DWG. NO. 5585CX</div> <div>REV. B</div>		
<div>THIRD ANGLE PROJECTION</div> <div></div>			<div>Electronically Controlled Use Latest Copy</div> <div>SHEET 1 OF 1</div> <div>Project: P12020</div> <div>Date Created: 2012-08-08</div>						

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2012 ECCO