





















MINIBARS



5587 Reflex® SAE Class I LED, 15"

The 5587 Series LED minibars provide a compact yet powerful warning solution that offers the flexibility of either permanent, vacuum-magnet or magnet mounting. Featuring 12-24 VDC operation, the Reflex® uses high intensity LEDs and reflective technology to maximize light output. Users can select from 18 flash patterns, either via trigger wire on permanent mount models or cigarette plug switch on magnetic models. Permanent mount models can also be synchronized to operate multiple lights alternately or simultaneously.


Models

PART NO.	MOUNT	LENS COLOR	LED COLOR OPTIONS
5587A	4 Bolt		
5587A-MG	Magnet		
5587A-VM	Vacuum-Magnet		
5587CA	4 Bolt		
5587CA-MG	Magnet		
5587CA-VM	Vacuum-Magnet		
5587CAX	4 Bolt		
5587CAX-MG	Magnet		
5587CAX-VM	Vacuum-Magnet		

Replace "X" in part number with desired color: A=amber, B=blue, C=clear

Features and Benefits

- 12-24 VDC, 4.6 Amps
- Eight LED reflector modules, each comprising three LEDs provide high intensity light output
- Choice of 18 flash patterns
- Polycarbonate base & low profile lens
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

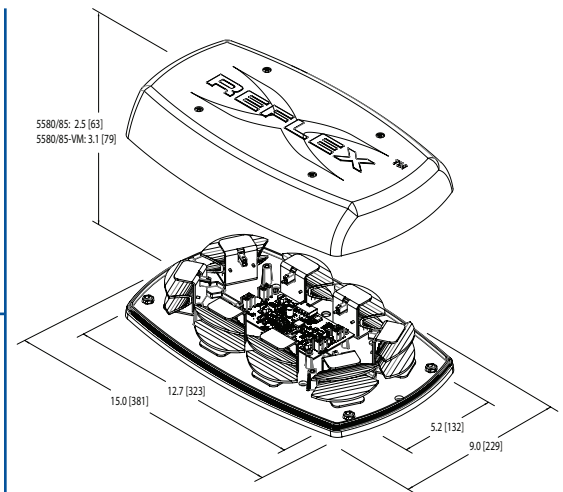

Flash Patterns

- Quad flash
- Double flash
- Fast double
- Slow quad
- Slow double
- Quint-hold
- Burst
- Quad, alternate
- Quad, diagonal
- Double, alternate
- Double, diagonal
- Quint-hold, alternate
- Quint-hold, diagonal
- Fast rotate
- Rotate / quad
- Wave rotate
- Random
- Steady on

Replacement Parts

- Domes: Amber - R5507LA
Clear - R5507LC

To view a Reflex® Family product video, visit [YouTube.com/ECCOSafety](https://www.youtube.com/ECCOSafety)