



TX-500 MULTI –CHARGER DATASHEET

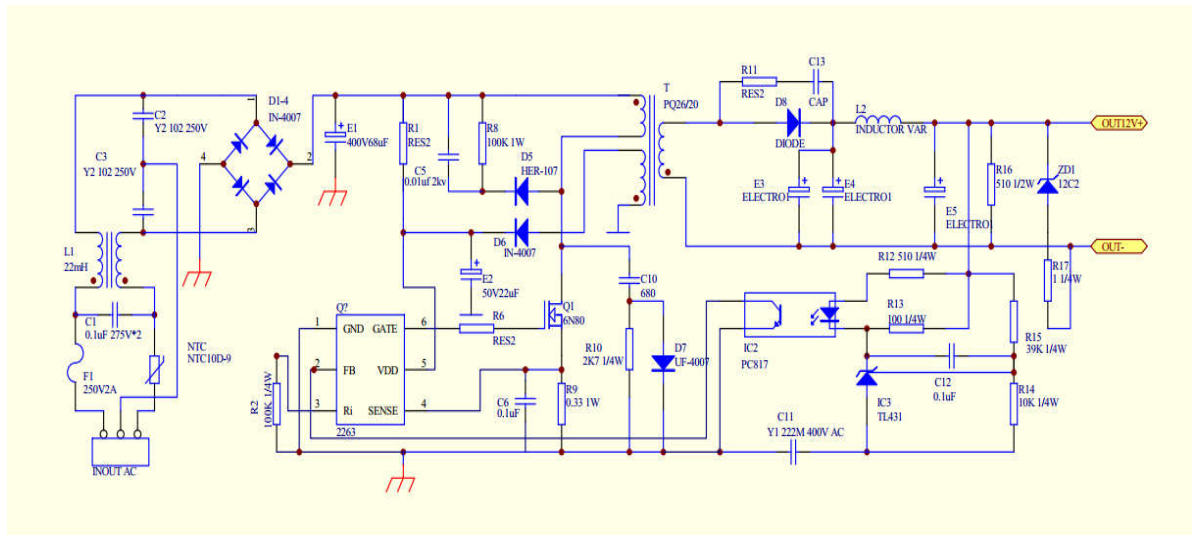

Input Voltage	Input Frequency	Input Current
110V-220V	50-60Hz	0.3A
Stand by	Power	
90-240VAC	<0.75W	
Normal Voltage	Adjustable Range	Limited
+12VDC	+/- 5%	11.8V ~12.8V
Input Voltage	Max	Limited
12V	3.1A	N/A
Working Temperature	Store Temperature	
0--45° C	-20--85° C	
Working Humidity	Store Humidity	
0--95%RH	0--95%RH	

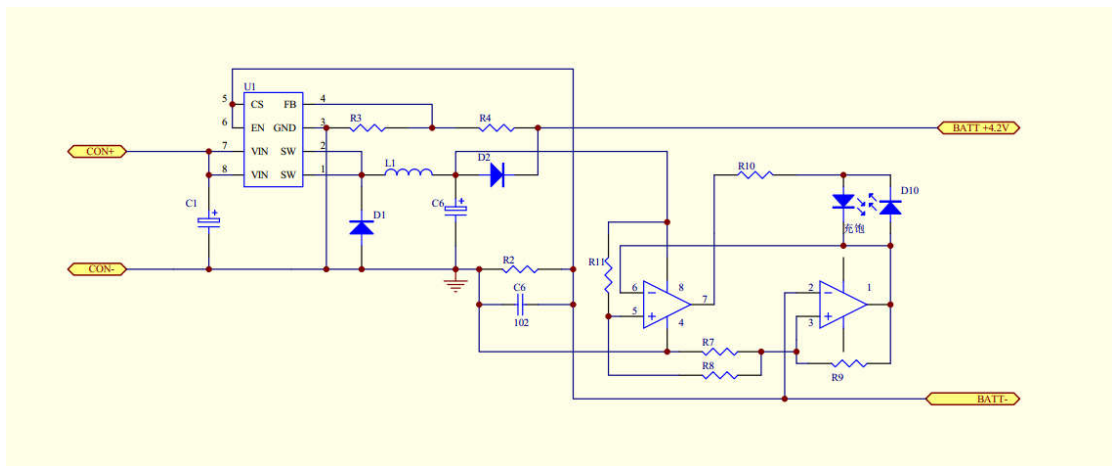

Items	Value	
Input Voltage Range	DC10V – 24V	
Input Current	$\geq 3A$	
Output constant voltage	8.8V-8.9V	
Output constant current	430MA-500MA	
Charging	Turn Red	
Full Charging	Turn Green	
Loading	Turn Green	