


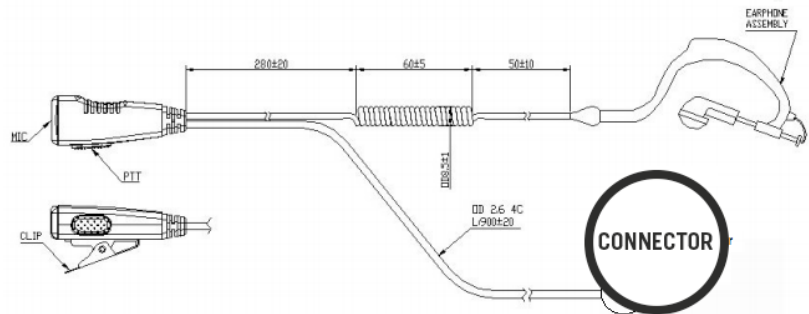

Model: **TX101N-**(xxx)

Connector Suffix

Radio Models

H03



HYT TC-700,TC-610,TC-620,TC-620H,TC-510,TC-585,TC-550S,TC-518,TC-580,TC-446S,TC-508,PMR446

Speaker Specification:

Type:	Transducer Moving coil dynamic speaker
Impedance:	32 $\Omega \pm 15\%$ @1 kHz
Sensitivity:	93 dB $\pm 10\%$ / 0.01 mW on a coupler
Frequency respond:	100 - 4 kHz
Rated input power:	0.01 mW
Maximum input power:	300 mW

Microphone Specification:

Sensitivity range:	-44 ± 3 dB {Odb = 1 V/Pa, 1 kHz}
Impedance max:	2.2 k $\Omega \pm 10\%$
Frequency:	50 Hz ~ 10 KHz
Current consumption max:	500 μ A RL = 2.2 k Ω Vs = 3.0 V(DC)
Operation voltage range:	1.0 ~ 10 V(DC)
Max Sound pressure Level:	110 dB f = 1 kHz