
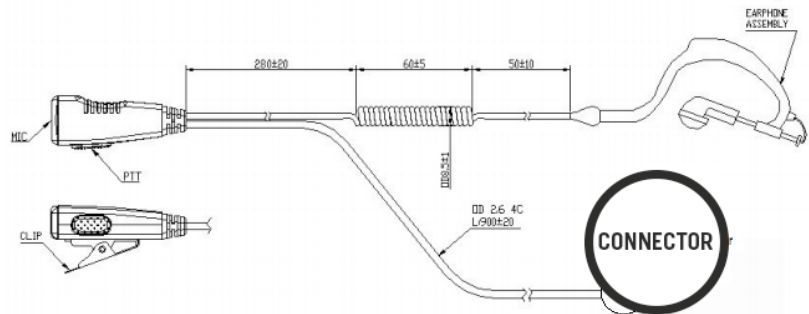




Model: **TX101N**-(xxx)

Connector Suffix	Radio Models	
H04		HYTERA TC320/1688
Speaker Specification:		
Type:	Transducer Moving coil dynamic speaker	
Impedance:	32 Ω ± 15% @1 kHz	
Sensitivity:	93 dB ± 10% / 0.01 mW on a coupler	
Frequency respond:	100 - 4 kHz	
Rated input power:	0.01 mW	
Maximum input power:	300 mW	
Microphone Specification:		
Sensitivity range:	-44 ± 3 dB {Odb = 1 V/Pa, 1 kHz}	
Impedance max:	2.2 kΩ ± 10%	
Frequency:	50 Hz ~ 10 KHz	
Current consumption max:	500 uA RL = 2.2 kΩ Vs = 3.0 V(DC)	
Operation voltage range:	1.0 ~ 10 V(DC)	
Max Sound pressure Level:	110 dB f = 1 kHz	