




Connector Suffix

Radio Models

H03

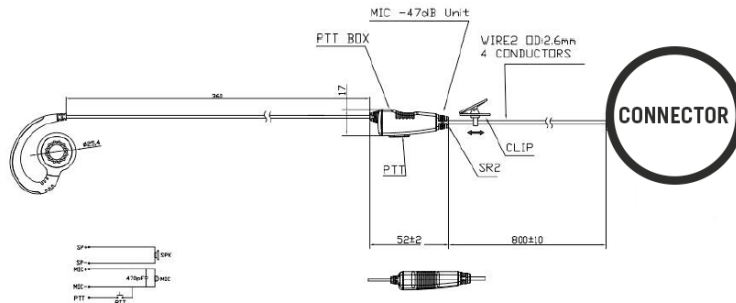

HYT TC-700,TC-610,TC-620,TC-620H,TC-510,TC-585,TC-550S,TC-518,TC-580,TC-446S,TC-508,PMR446

Speaker Specification:

Type:	Transducer Moving coil dynamic speaker
Impedance:	32 Ω $\pm$ 15% @1 kHz
Sensitivity:	115 dB $\pm$ 3 dB / 1 mW on a coupler
Resonance freq:	4 kHz $\pm$ 20%
Frequency respond:	400 - 9 kHz
Rated input power:	1 mW
Maximum input power:	300mW

Microphone Specification:

Sensitivity range:	-34 $\pm$ 2 dB RL = 2.2 k Ω Vs = 3.0 V(DC) 1 kHz 0dB=1 V/Pa
Impedance max:	2.2 k Ω 1 kHz (RL = 2.2 k Ω)
Frequency:	20 - 20 kHz
Current consumption max:	0.5 uA RL = 2.2 k Ω Vs = 3.0 V(DC)
Operation voltage range:	1.0 V - 10 V(DC)
Max sound pressure level:	115 dB S.P.L.