


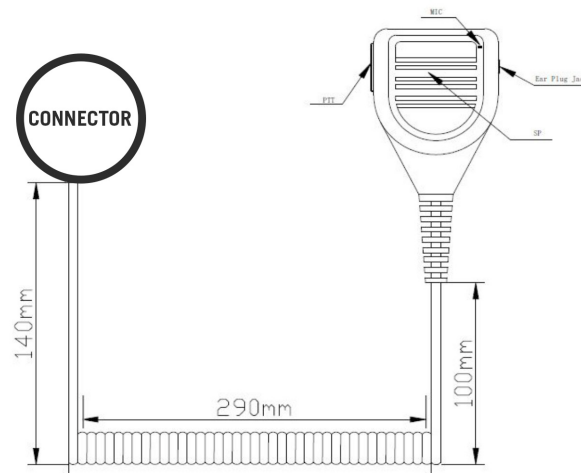

Model: TX309-(xxx)

Connector Suffix	Radio Models												
M01 	HYT TC-500/ 508/ 518/ 580/ 600/ 610/ 700 PD506, Motorola GP300/ SP-50/ P1225/ PRO3150/ MAG ONE/ EP150/350/ EP450/ DEP450/DTR620 /RVA50/VLR150												
Speaker Specification: <table> <tr> <td>Size:</td><td>Ø 12.5 * 2.0 mm</td></tr> <tr> <td>Sensitivity:</td><td>92 ± 3 dB / 1 Watt 0.5 Meter</td></tr> <tr> <td>Impedance:</td><td>8 Ω ± 15% at 1000 Hz</td></tr> <tr> <td>Frequency range:</td><td>(F0) ~ 20 kHz</td></tr> <tr> <td>Rated input power:</td><td>F0 ~ 9 kHz</td></tr> <tr> <td>Maximum input power:</td><td>500 mW</td></tr> </table>		Size:	Ø 12.5 * 2.0 mm	Sensitivity:	92 ± 3 dB / 1 Watt 0.5 Meter	Impedance:	8 Ω ± 15% at 1000 Hz	Frequency range:	(F0) ~ 20 kHz	Rated input power:	F0 ~ 9 kHz	Maximum input power:	500 mW
Size:	Ø 12.5 * 2.0 mm												
Sensitivity:	92 ± 3 dB / 1 Watt 0.5 Meter												
Impedance:	8 Ω ± 15% at 1000 Hz												
Frequency range:	(F0) ~ 20 kHz												
Rated input power:	F0 ~ 9 kHz												
Maximum input power:	500 mW												
Microphone Specification: <table> <tr> <td>Size:</td><td>Ø 6.0 * 2.7 mm</td></tr> <tr> <td>Sensitivity:</td><td>-30 ± 3 dB (0 dB = 1 V/Pa at 1 kHz)</td></tr> <tr> <td>Impedance:</td><td>2.2 kΩ 1 kHz (RL = 2.2 kΩ)</td></tr> <tr> <td>Frequency:</td><td>20 ~ 20 kHz (0 dB = 1 V/Pa, 1 kHz)</td></tr> <tr> <td>Operation voltage range:</td><td>1.0 - 10 V(DC)</td></tr> <tr> <td>Operating voltage:</td><td>1.0 V - 10 V(DC)</td></tr> </table>		Size:	Ø 6.0 * 2.7 mm	Sensitivity:	-30 ± 3 dB (0 dB = 1 V/Pa at 1 kHz)	Impedance:	2.2 kΩ 1 kHz (RL = 2.2 kΩ)	Frequency:	20 ~ 20 kHz (0 dB = 1 V/Pa, 1 kHz)	Operation voltage range:	1.0 - 10 V(DC)	Operating voltage:	1.0 V - 10 V(DC)
Size:	Ø 6.0 * 2.7 mm												
Sensitivity:	-30 ± 3 dB (0 dB = 1 V/Pa at 1 kHz)												
Impedance:	2.2 kΩ 1 kHz (RL = 2.2 kΩ)												
Frequency:	20 ~ 20 kHz (0 dB = 1 V/Pa, 1 kHz)												
Operation voltage range:	1.0 - 10 V(DC)												
Operating voltage:	1.0 V - 10 V(DC)												
Cable <table> <tr> <td>Diameter:</td><td>Ø 5.5 mm</td></tr> <tr> <td>Material:</td><td>PU</td></tr> <tr> <td>Operating temperature:</td><td>-30 ~ 120°C</td></tr> </table>		Diameter:	Ø 5.5 mm	Material:	PU	Operating temperature:	-30 ~ 120°C						
Diameter:	Ø 5.5 mm												
Material:	PU												
Operating temperature:	-30 ~ 120°C												