


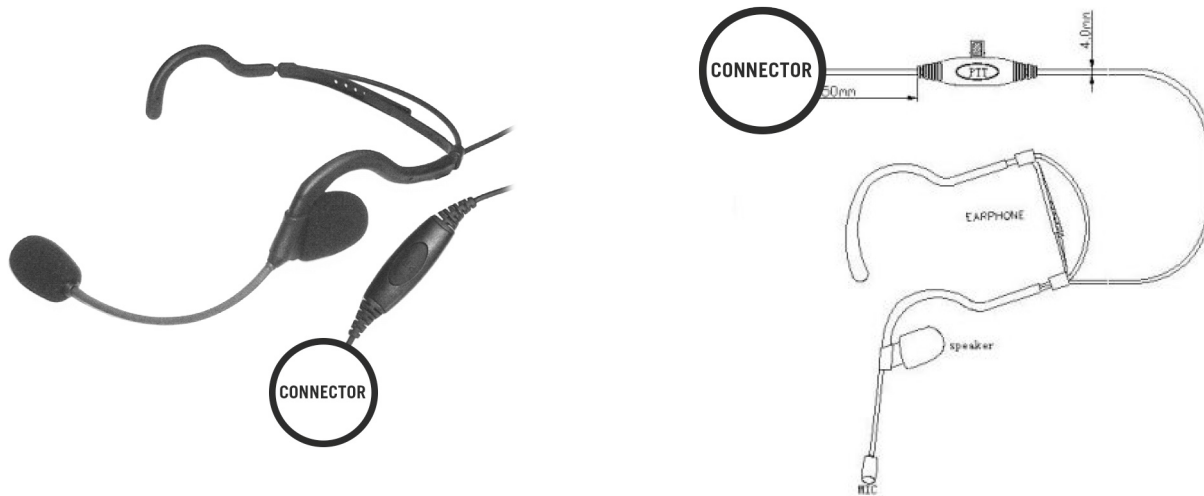

Model: **TX760-** (xxx)

Connector Suffix	Radio Models
S05 	ICOM IC-F4003/4013/2000/4021/4031/4103/4210/4230, IC-F14//3021/3013/3103/3003, IC-F1000/2000/S/T. Se fija al equipo con tornillos.
Speaker Specification:	
Type:	Transducer Moving coil dynamic speaker
Impedance:	$16 \Omega \pm 15\% @ 1 \text{ kHz}$
Sensitivity:	$110 \pm 3 \text{ dB @ 1 kHz}$
Resonance freq:	(F0) $400 \text{ Hz} \pm 20\%$
Frequency respond:	F0 ~ 9 kHz
Rated input power:	500 mW
Maximum input:	800 mW
Microphone Specification:	
Sensitivity range:	$-34 \pm 2 \text{ dB RL} = 2.2 \text{ k}\Omega \text{ Vs} = 3.0 \text{ V(DC)} 1 \text{ kHz } 0 \text{ dB} = 1 \text{ V/Pa}$
Impedance max:	$2.2 \text{ k}\Omega 1 \text{ kHz (RL} = 2.2 \text{ k}\Omega)$
Frequency:	100 - 12 kHz
Current consumption max:	$0.5 \text{ uA RL} = 2.2 \text{ k}\Omega \text{ Vs} = 3.0 \text{ V(DC)}$
Operation voltage range:	1.0 V - 10 V(DC)
Max sound pressure level:	115 dB S.P.L