


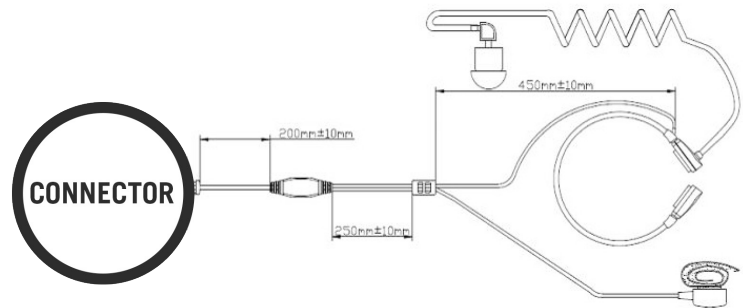

Model: **TX780-** (xxx)

Connector Suffix	Radio Models
H03 	HYT TC-700,TC-610,TC-620,TC-620H,TC-510,TC-585,TC-550S,TC-518,TC-580,TC-446S,TC-508,PMR446

Speaker Specification:

Type:	Transducer Moving coil dynamic speaker
Impedance:	32Ω±15% @1 kHz
Sensitivity:	115 dB±10% / 1 Watt 0.5 meter
Frequency respond:	(F0) 4 kHz ± 20%
Rated input power:	20-4 kHz
Maximum input:	300 mW

Microphone Specification:

Sensitivity range:	-40± 3dB RL=1.0K Ω Vs=2.0V(DC) 1KHz
Impedance max:	2.2KΩ 1kHz (RL=2.2KΩ)
Frequency:	20 - 20KHz
Operation voltage range:	0.5uA RL=2.2KΩ Vs=3.0V(DC)
Current consumption max:	1.1-10V (DC)
Max sound pressure level:	115 dB S.P.L.