




Model: **TX880-** (xxx)

Connector Suffix	Radio Models
K01	KENWOOD TK3230/3000/3402/3312/3360/3170, NX240/340/220/320/420, TKD240/340

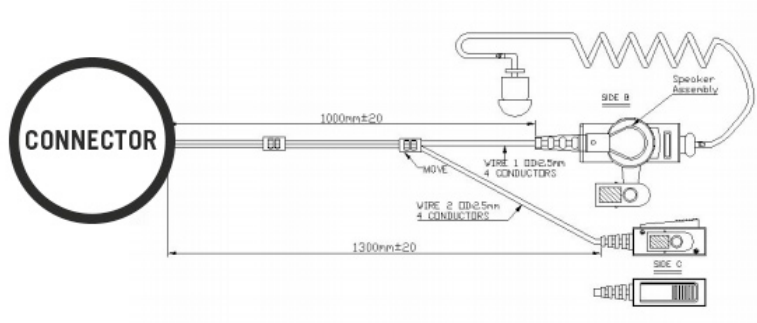

Speaker Specification:

Type:	Transducer Moving coil dynamic speaker
Impedance:	90 Ω $\pm$ 15% @1 kHz
Sensitivity:	120 $\pm$ 3 dB @1 kHz
Frequency respond:	F0~9 kHz
Rated input power:	500mW
Maximum input:	1000 mW

Microphone Specification:

Sensitivity range:	-36 $\pm$ 2 dB RL=2.2 k Ω Vs = 3.0 V(DC) 1 kHz 0 dB = 1V/Pa
Impedance max:	2.2 k Ω 1kHz (RL=2.2 k Ω)
Frequency:	50 - 1600 Hz
Current Consumption Max:	0.5 uA RL = 2.2 k Ω Vs = 3.0 V(DC)
Operation Voltage Range:	1.0V-10V (DC)
Max Sound pressure Level:	115 dB S.P.L.