



### Keyscan's USB-SER Communication Adaptor

When connecting to a computer, the USB-SER provides Keyscan system compatibility and offers RS485 to USB conversion as well as RS232 to USB conversion all on one compact easy to use device. The USB-SER is ideal for technicians, on the road demonstrations and instances where the access control computer does not have a serial communication port.

#### Features


- Converts RS-232 to USB communication
- Converts RS-485 to USB communication
- Powered through computer's USB port
- USB 1.1 or 2.0 compatible
- Includes 6ft (1.8m) USB extension cable for added convenience
- Has clear plastic sleeve for electrical isolation and viewing of board mounted TX and RX LEDs
- Ideal for single ACU communication
- Convenient for laptop programming/control or where COM port is unavailable

# USB-SER

## Communication Adaptor

### Applications:

---

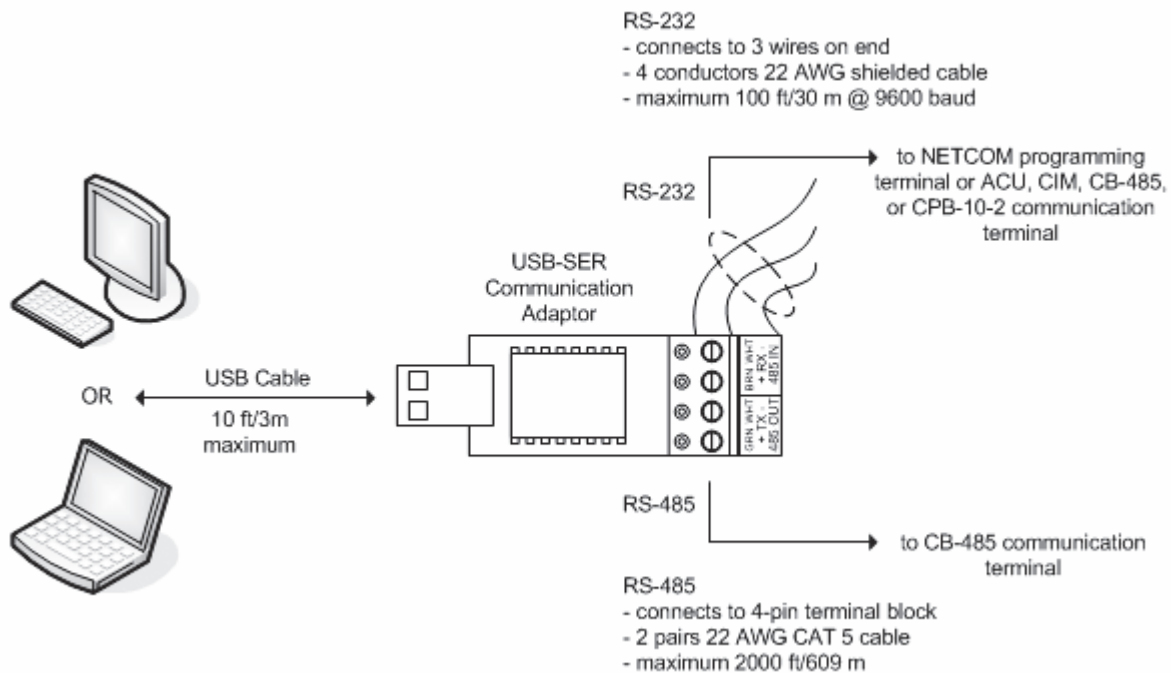

### Specifications:

---

#### Input Power Requirements

- Powered through PC/Laptop USB port

#### OS Compatibility

- Windows 2000 , Windows XP Pro, Windows Vista, Windows 7—Professional, Enterprise & Ultimate versions

#### Environmental

- Suitable for industrial and commercial applications.
- Operating temperatures: 5° to 70°C (41° to 158°F)

#### USB Compliant

- USB 1.1 or USB 2.0

#### Cable

##### RS-232

- 4 conductor 22 AWG shielded cable

##### RS-485

- 2 pair 22 AWG CAT5 cable

#### Dimensions

- 2 5/8" x 3/4" (7.0 cm x 1.9 cm)

#### Signal Protocols

- RS232 & RS-485

A Member of the Kaba Group



901 Burns Street East  
Whitby, Ontario, L1N 0E6, Canada  
Toll Free: 1.888.KEYSCAN (Canada/US)  
Tel: +1.905.430.7226  
Web: [www.keyscan.ca](http://www.keyscan.ca)

KEY 2015-01