

Taps 575-6000 MHz

SKU: 859119, 859120

FEATURES

- Wide Frequency Band 575-6000 MHz
- 2G/3G/4G/LTE/5G Coverage
- Low VSWR
- Low Insertion Loss
- High Isolation, Indoor & Outdoor Application IP65
- Widely used for In-building Solutions
- 2-year warranty



† **WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Specifications

TECHNICAL

Model	859119	859120
Frequency Band (MHz)	575-6000	
Coupling (dB)	7	10
Insertion Loss (dB)	≤1.5	≤1.1
Accuracy (dB)	±1.5	±1.5
Isolation (dB)		
575-2700 MHz	≥26	≥29
2700-3800 MHz	≥24	≥27
3800-4800 MHz	≥22	≥25
3800-4800 MHz	≥19	≥22

(cont'd)


VSWR	<1.30 (600-2700 MHz) <1.35(2700-6000 MHz)
PIM(dBc)	<-150dBc@2*43dBm (698-2700 MHz)
Impedance (Ω)	50
Power(W)	200/Port
Humidity (%)	5-95
Temperature	-30°C~+65°C
Application	Indoor or Outdoor IP65

Package Dimensions

859119 7.0" L x 3.125" W x 1.25" H | .890 lbs.

859120 7.0" L x 3.125" W x 1.25" H | .910 lbs.

FOR PARTNER'S USE

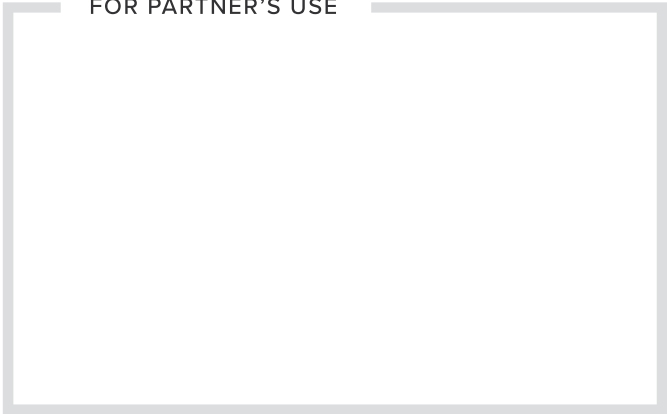

Taps575-6000Mhz_SpecSheet_Rev01_05.19.23

Support



2 Year Warranty

Email: support@wilsonelectronics.com

Website: <http://support.weboost.com>

Phone: +1 866 294 1660 Monday to Saturday

* **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

UPC

